


Model No.	Photo	Specification	Material&Charger&Packag e
TW-905		Surface Treatment Process:Polishing, tail plating, barrel painting Logo & Printing Method:Pad or Laser printing Dimension:L200*Diameter 17mm Material:Stainless Stell,ABS/PC,Zinc Alloy Battery:651140 lithium battery Battery Capacity:3.7v230mAh Charging Time:1-1.5 hours Output Voltage:10KV±20%	
TW-2401		Max voltage Output: 2 million volts Max Output: 281 lumens Max Beam Distance: 216 m Max Beam Intensity: 19256 cd Max Runtime: 40h LED: CREE XPE G2 Reflector: High light transmittance glass Glass: Filmed mineral glass Material: Aircraft-grade aluminum alloy Housing: HALL military grade hard anodized finish	 Accessories: 1×Type C cable, 1×Lanyard, 1×wall charger,1×car charger

TW-2403		Electric Shock Mode:Stun Device The electric shock is on for 5s everytime. When fully charged it offers 180 times of shock. Sound-light Alarm Mode:Buzzer & Strobe Buzzer decibel: about 90DB Strobe output: 500lm Runtime for continuous Buzzer and strobe:1.5 h Dimensions:0.87inch(Body Dia.)x6.5inch(Length) Weight:3.50z(Accessories notincluded) Material:Aerospace Aluminum 6061-T6 for main body Charging:Type-C interface, 5V 520mA; About 2.5 h charging time Battery:1x14500(800mAh 3.7V2.96Wh)	
TW-2301 Type C		Surface Treatment:Fine dermatoglyph LOGO and Method:UV printing Size:L89*W39*H21.5 Material:ABS/PC Battery:702517 200mAH Electric Shock Power:9W Electric Shock Method:Fixed shock pad Lighting LED lights:White light,Weak light, strong light, explosive flash Battery Indicator Light:Blue 5-100%,Blue 4-80%,Blue 3-50%,Blue 2-30%,Blue 1-10%	

TW-1803		1.Source voltage:4.8VDC 2.Current capacity:≥2.5A 3. charging current:33mA 4. charging voltage:100V~250V 5.Output pulse voltage:>20kv 6.Weight:120g 7.Size: L135mm×W61×H31mm	
TW-806		1.with electric shocking 2. with USB charging line,it can be used in any country 3. lithium polymer battery:3.7VDC (preventing over - charging and over - discharging protection) 4. Current: ≥2A 5. Output voltage: ≥200kv 6. Weight:60g 7. Product Size:L58mm×W24mmXH76mm 8.Packing size: 31X29X40 CM	

TW-1701

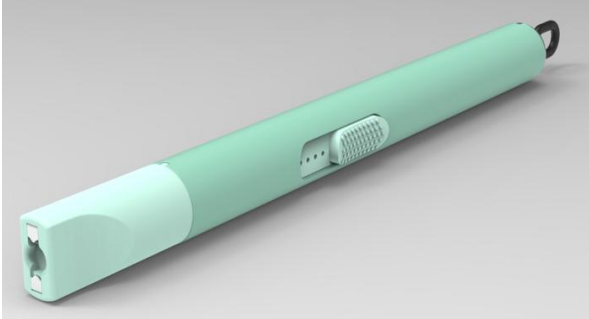

G.W.:14KGS
N.W.:13KGS
Package:100pcs/box
Carton Size:50*22.5*35.5cm
Color:Black
Function: Flashlight,electric shock
Charger:USB



TW-1806



G.W.:14KGS
N.W.:13KGS
Package:100pcs/box
Carton Size:85*40*20cm
Color:Black
Function: Flashlight,electric shock
Charger:USB



TW-1801		Lithium Battery voltage: 3.7VDC Output voltage:100KV Current capacity:≥1.8A Weight:52g Product Size: L85mm X L48mm X H28mm 1.with car keys shape 2.Led light 3.high voltage electric shock 4.with USB connecting wire 5.with alarm	 200pcs/carton, 17kgs/CTN USB Charger
TW-1802		with ABS plastic shell,good feeling with strong,weak and flash light with dual high voltage electric shock with charging cable 1.nickel-cadmium Battery voltage: 4.8VDC 2.Output voltage: 200KV 3.Current capacity:3A 4.Weight:120g 5. Product Size: L165mm×Ø33mm	ABS 1pcs/box,50pcs/carton 12KGS/CTN Wall Charger

TW-1901		Lithium Battery voltage: 3.7VDC Output voltage:100KV Current capacity:≥3.2A Weight:125g Product Size: L105mm X L46mm X H24mm 1.Led light 2.high voltage electric shock 3.with USB connecting wire 4.with battery indicator	100pcs/carton, 13kgs/CTN USB Charger
TW-1903 Type C		Lithium Battery voltage: 3.7VDC Output voltage:100KV Current capacity:≥1.8A Weight:38g Product Size: L156mm X Φ15.1mm 1.high voltage electric shock 2.with USB connecting wire 3.with battery indicator	 100pcs/carton, 9kgs/CTN USB Charger

TW-2003		Lithium Battery voltage: 3.7VDC Output voltage:100KV Current capacity:≥1.8A Weight:39g Product Size: L156mm X Φ15.1mm 1.with led light 2.high voltage electric shock 3.with USB connecting wire 4.with battery indicator 5.with ON/OFF switch	 100pcs/carton, 9kgs/CTN USB Charger
TW-618		1 Led light 2.high voltage electric shock 3.USB Charger 4.Nickel-Cadmium Battery Voltage:3.7V 5.Current:≥2.5A 6.Output Voltage:100kv 7.Weight:190g 8.Product Size:L103mm*W36mm*H24mm 9.Packing Size:133*45*35mm	ABS 1pcs/box,100pcs/carton 15KGS/CTN

TW-801 Type C		1 Led light 2.high voltage electric shock 3. Built-in charger/charging cable/USB 4. nickel-cadmium Battery voltage: 4.8VDC 5. Current: $\geq 2.5A$ 6. Output voltage: 180kv 7. Weight: 97g 8. Product Size: L96mm×W38mmXH23mm 9. Packing way: gift box 10.Packing size: 143X65X38 MM	 ABS 1pcs/box,100pcs/carton 15KGS/CTN
TW800 Type C		1 Led light 2.high voltage electric shock 3. Built in charger/USB/charging cable 4. nickel-cadmium Battery voltage: 3.6VDC 5. Current: $\geq 2.5A$ 6. Output voltage: 180kv 7. Weight: 140g 8. Product Size: L103mm×W54mmXH25mm 9. Packing way:soft box 10.Packing size: 118X60X40 MM	 ABS 1pcs/box,100pcs/carton 14KGS/CTN

TW-1502
Type C



- 1.Input voltage:3.7VDC
- 2.Current capacity:≥1.8A
- 3.Output voltage:>100kv
- 4.Weight:52g
- 5.Size:L89mm×W25mm×H17mm



ALUMINUM
1pcs/box,200pcs/carton
15KGS/CTN(Blister packing)
1pcs/box,200pcs/carton
14.5kgs/CTN(gift box
packing)

TW-1602
Type C



- 1.Input voltage:3.7VDC
- 2.Current capacity:≥1.8A
- 3.Output voltage:>100kv
- 4.Weight:52g
- 5.Size:L89mm×W25mm×H17mm



ALUMINUM
8KGS/CTN(Blister packing)
1pcs/box,100pcs/carton

TW-398		1. Cambered appearance, high quality, good feeling 2. Improved output of current, effectual self-defense. 3. High power and super bright LED flash light. 4. Built-in charger Specification: 1.power input: 4.8VDC 2. current : $\geq 2.0A$ 3. power output: $> 180kv$ 4.weight:125g 5. size: L104mm, W42mm, H24mm	 ABS 1pcs/box,100pcs/carton 17KGS/CTN
TW-1101		Specification: 1.AC Volatge:110/220V 50-60Hz(for charging) 2.Power input:DC4.8V 3.Current: $\geq 2.5A$ 4.Size:165*35*28(mm) Weight:180g	 ALUMINUM 1pcs/box,50pcs/carton 15KGS/CTN

TW-2102		Size:110(L)X23(DIA) Source voltage:3.6VDC Output voltage:≥300kv N.W.:60g Material of body shell:Aerospace Grade Aluminum LED light:180 Lumens Function:electric shock, LED flashlight	
TW328		1. metal case ,lipstick design with led light 2.with high voltage electric shock 3. with connecting wire with plug (for 110V) 4. nickel-cadmium Battery voltage: 3.6VDC 5. Current: ≥2.0A 6. Output voltage: ≥300kv 7. Weight: 94g 8. Product Size: L128mm×Maximum diameter 26.5mm 9. Packing way: gift box 10.Packing size: 280X70X60MM	 ALUMINUM 1pcs/box,100pcs/carton 15.5KGS/CTN Wall Charger

TW309		Material:ABS Size:125*35*25 MM(L*W*H) Color:Black, pink, purple Function:Self Defense, LED Lighting, Electric Shock Current:≥2.0A Output voltage:≥300kv Weight:125g	 ABS 1pcs/box,100pcs/carton 20KGS/CTN
Tw916		1 Led light 2.with electric shock 3. With safety pin, protect yourself from being shocked 4. with connecting wire with plug (for 110V) 5. nickel-cadmium Battery voltage: 6VDC 6. Current: ≥2.0A 7. Output voltage: >300kv 8. Weight: 420g 9. Product Size: L175mmXW45mmXH30mm 10. Packing way: gift box 11.Packing size: 185X85X54MM	 ABS 1pcs/box,50pcs/carton 14.5KGS/CTN Wall Charger

TW928 Type C		1.Led light 2.with electric shock 3. with connecting wire with plug (for 110V) 4. nickel-cadmium Battery voltage: 6VDC 5. Current: $\geq 2.5A$ 6. Output voltage: $\geq 300kv$ 7. Weight: 420g 8. Product Size: L169mm×W45mmXH30mm 9. Packing way: gift box 10.Packing size: 203X73X48 MM	 ABS 1pcs/box,50pcs/carton 14.5KGS/CTN Wall Charger
TW-6S	 CE RoHS	1. input voltage: 3.7VCD 2. power current: $\geq 2.5A$ 3. electrical voltage: $\geq 100KV$ 4. weight: 70g 5. size: L138xW67xH11mm 6.Function:Self Defense, LED Lighting, Electric Shock,Alarm 7.Charging Method:USB Charging	ABS 1pcs/box,100pcs/carton, 19KGS/CTN

TW1109		1. Supply Voltage: 6VDC 2. Consumption Current: $\leq 1.9\text{A}$(shocking) $\leq 0.8\text{A}$(illumination) 3. Power output: $\geq 400\text{KV}$ 4. Weight: 220G 5. Size: L183mm$\times$$\Phi$43mm 6. Function: electric shock; Strong light	 Aluminum 1pcs/box,50pcs/carton 19kgs/CTN Wall Charger
TW8810		1. Supply Voltage: 6VDC 2. Consumption Current: $\leq 1.9\text{A}$(shocking) $\leq 0.8\text{A}$(illumination) 3. Power output: $\geq 400\text{KV}$ 4. Weight: 250G 5. Size: L193mm$\times$$\Phi$45mm 6. Function: electric shock; Strong light	 Aluminum 1pcs/box,50pcs/carton 21kgs/CTN Wall Charger

TW10		1 Led light 2.with electric shock 3.with high-decibel alarm 4.Built in charger/charging cable 5. nickel-cadmium Battery voltage: 6VDC 6. Current: $\geq 2.5A$ 7. Output voltage: $\geq 300kv$ 8. Weight: 260g 9. Product Size: L175mmXW75mmXH33mm 10. Packing way: gift box 11.Packing size: 188X78X50MM	 ABS 1pcs/box,100pcs/carton 33KGS/CTN
Small TW-809		1 Led light 2.with electric shock 3. With safety pin, protect yourself from being shocked 4. with connecting wire with plug (for 110V) 5. nickel-cadmium Battery voltage: 6VDC 6. Current: $\geq 2.5A$ 7. Output voltage: $>300kv$ 8. Weight: 350g 9. Product Size: L300mm×Maximum diameter 45mm 10. Packing way: gift box 11.Packing size: 327X68X54MM	ABS 1pcs/box,50pcs/carton 22KGS/CTN Wall Charger